



SCAFFOLD WALKWAY BOARDS

Anti-Slippery is a high performance and reliable alternative to traditional materials, specifically engineered to withstand the challenges of demanding construction environments.

It stands out with key features that make it the ideal choice for a wide range of applications.

SUPERIOR ANTI-SLIP PROPERTIES

Its textured or studded surface provides excellent grip even in the harshest conditions such as rain, mud, oil, or debris, significantly reducing the risk of slips and falls.



WEATHERPROOF AND LOW MAINTENANCE


Non-absorbent and unaffected by water exposure. Cleaning is quick and easy usually just a simple rinse with water is enough.



EXCEPTIONAL DURABILITY AND LONGEVITY

Highly resistant to impact, chemicals, and UV radiation. It does not rot, rust, or corrode, offering a longer service life and minimizing the need for frequent replacement.

ANTI-SLIP PATTERN OPTIONS

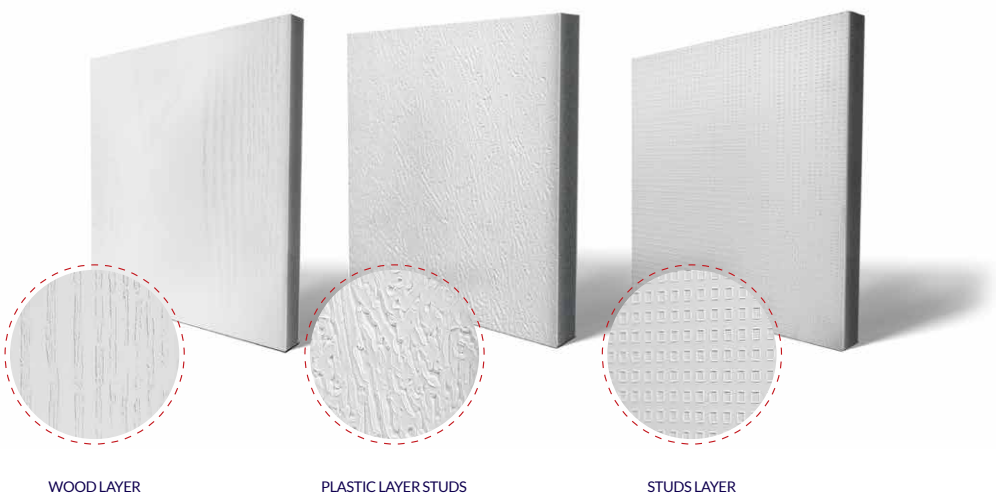

WOOD LAYER

PLASTIC LAYER STUDS

STUDS LAYER

PRODUCT SPECIFICATIONS

DIMENSIONS (MM)	TOLERANCE (MM)
- Customizable upon request - Length: Up to 6000mm, width: Up to 1250mm - Thickness: 8mm, up to 30mm with intervals each 0.50mm	- Length ± 0.5mm/m - Width ± 0.5mm/m - Thickness ± 0.3mm

TECHNICAL SPECIFICATIONS OF (ANTI-SLIP BOARD)

Thickness	Modulus of Elasticity	Static Bending	Allowable Stresses	Tensile Stress	Anti-Slippery Class	Max. Live Loads	Vicat Softening Temperature	Water Absorption Rate	Fire Retardant
9 MM	3500	52	28.43	15	Good > 45 PTV	2KN/M2 Class 3	85°C	<0.09%	Grade A
12 MM	3500	45	24.60	15					
15 MM	3000	38	20.78	13					
18 MM	2500	31	16.95	11					
21 MM	2000	24	13.12	11					
27 MM	1800	18	9.84	11					
Test Method	ASTM D790 - 17	ASTM D790 - 17	ASTM D790 - 17	ASTM D790 - 17	ASTM D143-14	ASTM D143-14	ISO 527-1:2019	ASTM D790 - 17	ASTMD570 -22

PROCESSING

- On-site: functions comparable to plywood.
- Industrial production: optimized for precise cutting and drilling

WARRANTY



ACROW Long-Term Warranty **2 YEARS** of Guaranteed Performance



Excellent Dimensional Stability



Enhanced UV Stability



Waterproof and Moisture-Resistant



Alkali Resistance